


Cell Type CR2016

Specifications

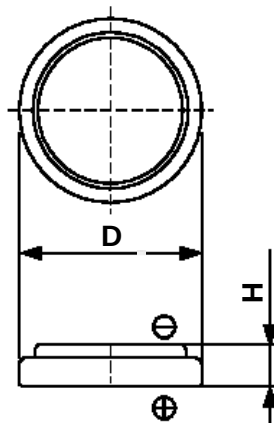

Nominal Voltage (V)	3
Nominal Capacity (mAh) ^{*1}	90
Standard Discharge Current (mA)	0.2
Operating Temperature Range (°C) ^{*2}	-20 ~ +70
Max. Dimensions (mm)	Diameter (D) 20.0
	Height (H) 1.6
Approx. Weight (g)	1.7


*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

*2 Consult with FDK when using batteries at temperatures exceeding -20°C to +60°C range.

Typical Characteristics


Continuous Discharge Characteristics of CR2016

Temperature : 20°C / 温度: 20°C

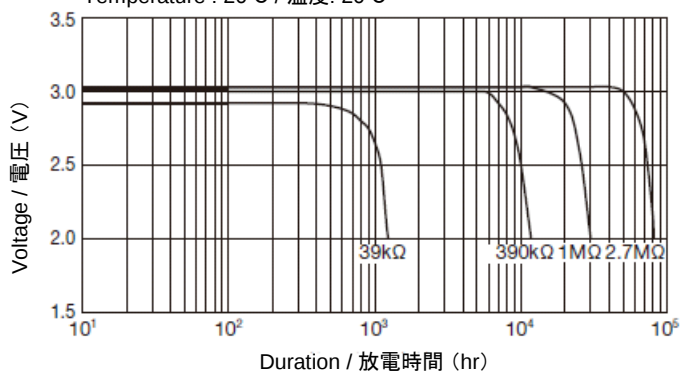


Temperature Characteristics of CR2016

Discharge Load : 15kΩ / 放電抵抗: 15kΩ

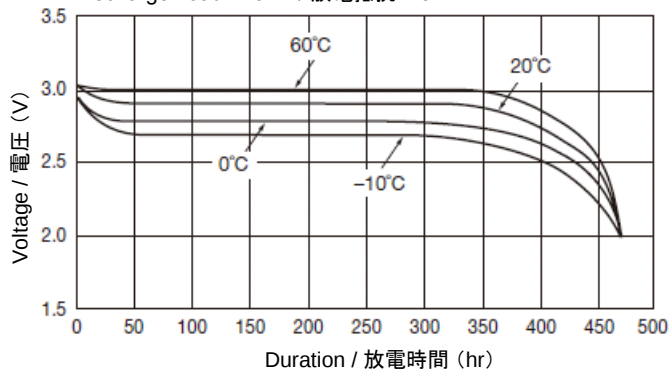

Pulse Discharge Characteristics of CR2016

Temperature : 20°C / 温度: 20°C

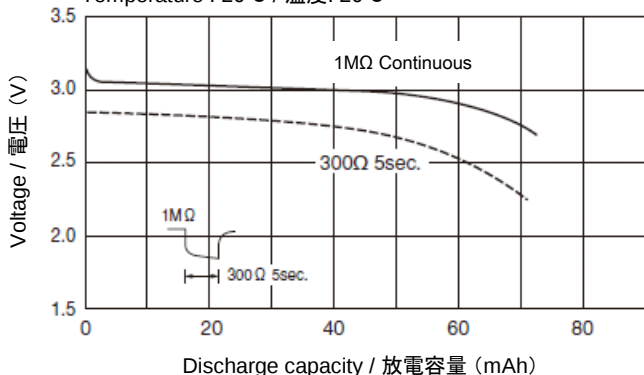

Discharge Load vs. Discharge Capacity of CR2016

End voltage : 2V / 終止電圧: 2V

